




# Nu-Recycling Technology, Inc.

## NuReTec<sup>®</sup> 2000/6

®

NuReTec

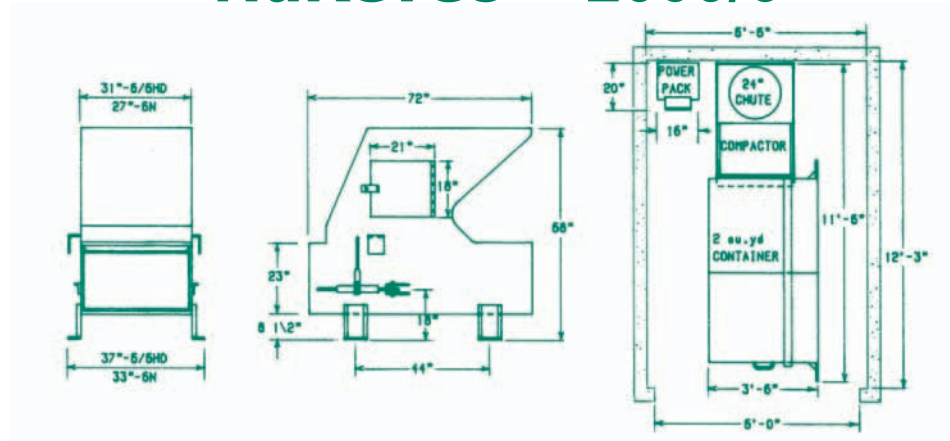

FRONTVIEW

SIDE VIEW

TYPICAL LAYOUT

### SPECIFICATIONS

Chamber Capacity	0.29 cu. yds
CycleTime	28 seconds
Displacement per hour	33 cu.yds
Ram Face Pressure (N)	38 psi
Ram Face Pressure (M)	51 psi
Packing Force (N)	20,160 lbs.
Packing Force (M)	27,720 lbs.
Ram Penetration	5 inches
Chamber Opening	23"L x 30.5"W
Ram Height	18 inches
Ram Width	30.5 inches
Overall Dimensions	72"L x 39"W x 68"H
Length w/container	138"

### STRUCTURAL

Floor	AR 1/4" Plate
Ram Face	3/8" Plate
Main Frame & Hopper	1/4" Plate
Ram Top and Base	1/4" Plate

### HYDRAULIC

Power Unit	Remote
Cylinders	4" Bore, 2" Rod
Pump	5 GPM
Oil Tank	14 Gals

### ELECTRICAL

Motor	5HP, 1800 RPM
Motor Power	208/220/440 V, 3PH, 60Hz
Circuits	115VAC, 24 VDC

STANDARD FEATURES Photo-Electric Eye w/Timer, Door Safety Interlock, Key Start, Transformer

**Nu-Recycling Technology, Inc.**  
10364 Book Road - Naperville, IL 60564  
630-904-5237 - 800-NuReTec